



Intrinsically Safe Permissible Polymer Penlight

This penlight is cETLus, ATEX, IECEx, MSHA and INMETRO listed Intrinsically Safe Permissible. It is ultra-compact and super slim with a powerful light output designed to illuminate very tight spaces. The tail-cap switch provides momentary or constant-on functionality. Power comes from 2 AAA premium batteries (included).

**INTRINSICALLY SAFE
PERMISSIBLE**



30 Lumens

- cETLus, ATEX, IECEx and MSHA listed Intrinsically Safe Permissible
- Engineered polymer housing
- Powered by AAA batteries



XPP 5410G



High-efficiency deep parabolic reflector

Intrinsically Safe Permissible Polymer Penlight




XPP-5410G

FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused beam for distance illumination
- Engineered polymer housing
- Single tail switch
- Waterproof
- Impact & chemical resistant
- Built-in pocket/belt clip
- Powered by 2 AAA batteries (included)
- Limited Lifetime Warranty*

XPP-5410G SPECIFICATIONS

- Lumens: 30
- Run-time: 18 hrs
- Beam distance: 40 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 5.8in, head diameter: 0.9in, handle diameter: 0.7in, weight: 1.9oz

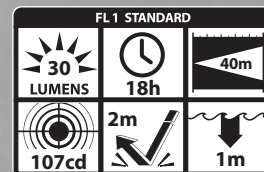

INCLUDED


- Flashlight
- 2 AAA premium alkaline batteries

SAFETY RATING

cETLus, ATEX, IECEx and MSHA listed Intrinsically Safe Permissible.

Patent 7,738,229

Model	UPC 0 17398
XPP-5410G	80298 7

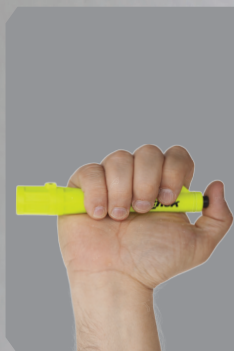

Handheld



High-efficiency deep parabolic reflector



Push-button tail-cap switch

Permissible XPP-5410 Flashlight Assembly
APPROVAL No. 20-A140006-0

TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY
WARNINGS: The Model XPP-5410 is MSHA approved for use with Energizer (Type E92), two Energizer (Type EN92), and Duracell (Type MX2400), Duracell (PC2400), and Duracell (EN92) batteries only. Replace the batteries in fresh air only and replace all batteries at the same time. Do not mix batteries from different manufacturers or of different types. The Model XPP-5410 must not be opened in area where permissibility required.

 UL ID 4001184 INTRINSICALLY SAFE SECURITE INTRINSEQUE	 CE 0359 CLASS I DIV 1 GRPS A-D T3 CLASS II & III DIV 1 GRPS E-G T135C CLASS I ZONE 0 AEx ia IIC T3 Ga CLASS I ZONE 0 Ex ia IIC T3 Ga Ex ia op is I Ma Ex ia op is IIC T3 Ga Ex ia op is I Ma Ex ia op is IIC T3 Ga Ex ia op is I Ma Ex ia op is IIC T3 Ga	 ATEX ID 4001184 INTRINSICALLY SAFE SECURITE INTRINSEQUE CLASS I DIV 1 GRPS A-D T3 CLASS II & III DIV 1 GRPS E-G T135C CLASS I ZONE 0 AEx ia IIC T3 Ga CLASS I ZONE 0 Ex ia IIC T3 Ga Ex ia op is I Ma Ex ia op is IIC T3 Ga Ex ia op is I Ma Ex ia op is IIC T3 Ga
---	---	---

Conforms to:
ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11, ANSI/ISA 60079-26

Certified to:
CAN/CSA STD C22.2 No 157, CAN/CSA STD C22.2 No 60079-0, CAN/CSA STD C22.2 No 60079-11, CSA STD C22.2 No 25

*Limited Lifetime Warranty • Product is warranted to be free from defects in workmanship and materials for the original purchaser's lifetime. The Limited Lifetime Warranty includes the LEDs, housing and lenses. Rechargeable batteries, chargers, switches, electronics and included accessories are warranted for a period of two (2) years with proof of purchase. Disposable, non-rechargeable batteries are excluded from this warranty. Normal wear and failures which are caused by accidents, misuse, abuse, faulty installation and lightning damage are also excluded.